




DigiView™ Plus

DIGITAL CAMERAS AND ACCESSORIES

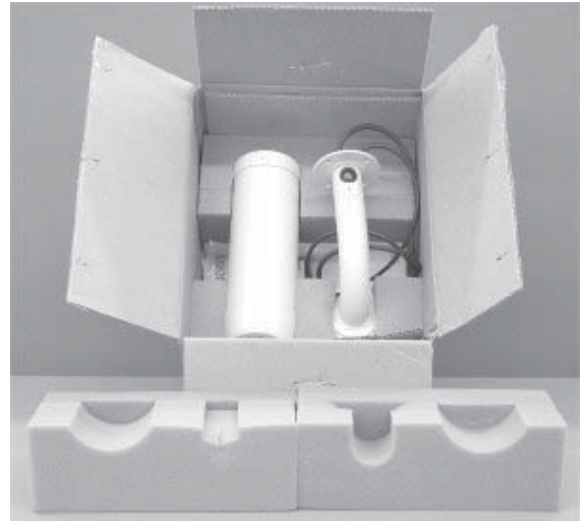

Exceptional packaging protects components

FEATURES

- Compact, attractive design for indoor or outdoor use
- Standard pre-assembled camera, auto iris and varifocal lens
- Slide-off cover provides full accessibility to camera for quick installation and service
- Available with or without heater
- Optional sunshield and ceiling mount
- Feed-through mounting brackets conceal cabling
- Aluminum and advanced polymer construction withstands all weather conditions



Slide-off design for full accessibility

DigiView Plus™ Indoor/Outdoor Cameras

FEATURES



Standard "L" bracket with outdoor enclosure



3.5 - 10.5mm
Auto Iris
Varifocal lens



B&W or Color cameras



5 - 50mm
Auto Iris
Varifocal lens



Slide-off design for full accessibility



with optional ceiling 'J' bracket

SPECIFICATIONS

Heater Power Supply	Requires 24VAC 15 watt power input
Camera Power Supply	Use only with 24VAC cameras
Maximum Camera and Lens Size	68 (W) x 54 (H) x 197(L)mm 2.68" (W) x 2.1" (H) x 7.75" (L)
Cable Entry	Two liquid tight rear fittings accept cable diameters from 4.3mm to 11.9mm. Two bottom feed-through liquid tight fittings accept cable diameters from 4.6mm to 7.9mm.
Window	3mm (0.12") thick UV stabilized polycarbonate.
Housing Mounting	Four available 1/4 - 20 tapped holes. Only one set of two are required for mounting.
Camera Mounting	Removable camera bracket. Mounted with two screws.
Construction	Aluminum cover, aluminum base, aluminum mounting foot, polycarbonate faceplate, glass reinforced polycarbonate end caps, neoprene gasket, ethylene propylene seal, and all stainless steel hardware.
Finish	Light grey.
Dimensions	96 (Dia) x 277 (L) mm 3.75" (Dia) x 10.9" (L)
Weight	1.4kg (3lbs.)
Internal Temperature (with Heater)	At external temperature of -40 °C to +50 °C (-40 °F to +122 °F) maintains internal temperatures between -20 °C and +55 °C (-4 °F to + 131 °F) with heater.
Camera Lens	3.5-10.5mm and 5 - 50mm (1/3" format) auto iris varifocal lens
Lux sensitivity	Black & white camera - 0.18 lux sensitivity @ f1.2 Color camera - 1.2 lux sensitivity @ f1.2
High Resolution	Black & white camera - 570 horizontal lines Color camera - 480 horizontal lines
Enclosure Protection	Designed to NEMA-3R, IP55
Safety Compliance	CE, UL, cUL
Accessories	Sunshield: Provides protection from the direct rays of sun and promotes cooling to reduce internal housing temperatures in hot climates. Wall bracket: Attached to the foot of the housing allows wires to be fed-through the mount and into the foot of the housing. Ceiling 'J' bracket: Allows housing to be mounted from ceiling and allows wires to be fed-through the mount and into the foot of the housing.